


COMBINATION ROLLERS BW 100 AC-5, BW 120 AC-5


PERFORMANCE DATA

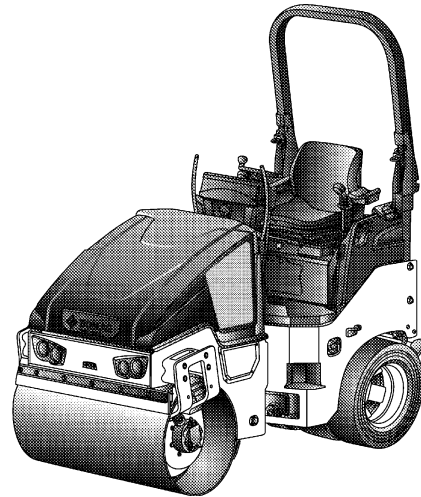

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BW 100 AC-5	15-35	35-50	45-90
BW 120 AC-5	20-40	40-60	55-105

Technical Data

Shipping dimensions in m3	without ROPS	with ROPS
BW 100 AC-5	4,902	6,962
BW 120 AC-5	5,816	8,261

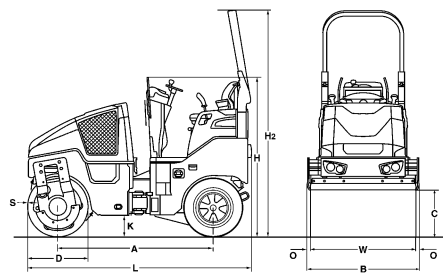

Standard Equipment

- ☒ Four smooth rear rubber wheels
- ☒ Pressure sprinkler system with interval switch
- ☒ Suspended operator's platform
- ☒ 2 scrapers per drum, spring loaded and tiltable
- ☒ Multi function travel lever
- ☒ Multi-function display incl. operating hour meter
- ☒ Water level
- ☒ electronic fuel gauge
- ☒ Emergency STOP
- ☒ Intelligent Vibration Control (IVC)
- ☒ Integrated stowage compartment
- ☒ Adjustable operator's seat
- ☒ Lashing eyes, galvanized
- ☒ Back-up alarm
- ☒ Single point lifting device
- ☒ V-belt protection
- ☒ Vandalism protection
- ☒ Lockable engine hood made of composite material
- ☒ Working lights front and rear
- ☒ 12V socket
- ☒ Seat contact switch
- ☒ Plastic water tank

Optional Equipment

- ☐ * Foldable ROPS incl. seat belt
- ☐ Edge cutter
- ☐ Sliding seat incl. double travel lever
- ☐ Battery disconnect switch
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Optional lighting on ROPS
- ☐ Sun roof, rigid
- ☐ Sun roof, foldable with ROPS
- ☐ Weather protection for sun roof
- ☐ Special painting
- ☐ Seat heating
- ☐ Backup warning buzzer with broadband technology
- ☐ Environmentally compliant hydraulic oil
- ☐ Tool kit
- ☐ Theft protection
- ☐ BOMAG TELEMATIC
- ☐ ECONOMIZER

* Standard delivery with CE conformity (valid within European Union)

Dimensions in mm

	A	B	C	D	H	H2	K	L	O	S	W
BW 100 AC-5	1752	1072	523	700	1808	2568	254	2529	36	13	1000
BW 120 AC-5	1752	1272	523	700	1808	2568	254	2529	36	13	1200

Technical Data

Weights

Operating weight w. ROPS CECE	kg	2.300	2.450
Axle load, drum / wheels CECE	kg	1.150/1.150	1.200/1.250
Wheel load CECE	kg	288	313
Static linear load, front CECE	kg/cm	11,5	10,0
Grossweight	kg	2.800	2.950

Dimensions

Working width	mm	1.000	1.200
Track radius, inner	mm	2.550	2.450

Driving Characteristics

Speed	km/h	0- 10,0	0- 10,0
Working speed with vibration	km/h	0- 10,0	0- 10,0
Max. gradeability without/with vibr.	%	40/30	40/30

Drive

Engine manufacturer	Kubota	Kubota
Type	D 1703	D 1703
Emission stage	3a /4i	3a /4i
Cooling	water	water
Number of cylinders	3	3
Performance ISO 14396	kW 24,3	24,3
Performance SAE J 1995	hp 32,6	32,6
Speed	min-1 2.600	2.600
Speed adjustment 1	min-1 2.500	2.500
Speed adjustment 2	min-1 2.600	2.600
Electric equipment	V 12	12
Driven drum	standard	standard
Driven wheels	4	4

Drums and Tyres

Tyre size	205/60-15	9.5/65-15
-----------------	-----------	-----------

Brakes

Service brake	hydrost.	hydrost.
Parking brake	hydromec.	hydromec.

Steering

Steering system	oscil.artic.	oscil.artic.
Steering method	hydrost.	hydrost.
Steering / oscillating angle +/-	grad	32/10
Crab walk	0- 50	0- 50

Exciter system

Vibrating drum	front	front
Drive system	hydrost.	hydrost.
Frequency	Hz	63/67
Amplitude	mm	0,49/0,49
Centrifugal force	kN	30/34

Sprinkler System

Type of sprinkling	pressure	pressure
--------------------------	----------	----------

Capacities

Fuel	l	35,0	35,0
Water	l	160,0	160,0
Emulsion	l	45,0	45,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

